

⑫

EUROPEAN PATENT SPECIFICATION

⑬ Date of publication of patent specification: **29.06.88**

⑭ Int. Cl.⁴: **H 01 R 31/06**

⑮ Application number: **84308875.8**

⑯ Date of filing: **18.12.84**

⑰ **Adaptor comprising sliding pin carriers.**

⑱ Priority: **08.02.84 GB 8403294**

⑲ Date of publication of application:
02.10.85 Bulletin 85/40

⑳ Publication of the grant of the patent:
29.06.88 Bulletin 88/26

㉑ Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

㉒ References cited:
EP-A-0 104 279
DE-A-3 109 620
GB-A-2 097 202

㉓ Proprietor: **Rumble, Clive St. John**
51 Hays Mews
London W1X 5DB (GB)

㉔ Inventor: **Rumble, Clive St. John**
51 Hays Mews
London W1X 5DB (GB)

㉕ Representative: **Daley, Michael John et al**
F.J. CLEVELAND & COMPANY 40/43 Chancery
Lane
London, WC2A 1JQ (GB)

EP 0 156 076 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

This invention relates to a plug-in electrical connecting device having, at one end a plurality of pin arrays selectable to suit the mains power source of the locality of use, and at the other end a socket or equivalent connection for an appliance with a plug which would not otherwise be useable. Such a multiple-pin device will hereinafter be referred to as an "adaptor". GB—A—2,097,202 discloses a multi-pin adaptor having the pin arrays at the front end. In this adaptor no means are provided for extending and retracting the pins; the pins are slidably mounted so as to be pulled, shaken or allowed to fall out under gravity being subsequently longitudinally located in the forward position.

A multi-pin adaptor in accordance with the present invention is characterised by a tubular casing, a plurality of carriers slidably longitudinally in the casing, each carrying a forwardly extending array of pins and being slidable between a rear pins-retracted position and at least one forward pins-protruding position, guides in peripheral walls of the casing engaged by complementary parts laterally disposed on the respective carriers and releasable detent means operable from outside the casing, the arrangement being that with a carrier moved at least to a front position and preferably also to the rear position the detent means operates securely to locate the carrier in that position until the detent is released.

EP—A—0,104,279 being art under Article 54(3) discloses a multi-pin adaptor wherein one pair of pins are on a slidable carrier totally enclosed by the casing and having no means for advancing and retracting the carrier.

Each sliding carrier will be conductively associated with appropriate means to connect the pin to the socket or other appliance connection at the rear of the adaptor.

Although other forms of carrier arrays can be envisaged with the releasable detent means the stacked is preferred. It is further preferred that operating lugs or other means for the carrier should also release and engage the detent means. These functions can however be separated.

In an embodiment the guides are slots extending along diametrically opposed positions in the walls of a tubular casing. A resiliently flexible limb extends from each side of a sliding carrier, each limb having an outwardly directed operating part to pass through the slot and being laterally inwardly movable against its resilience from outside the casing. The limb also has a projection to engage with corresponding notches on the casing thereby providing the detent. This arrangement can obviously be reversed with notches on the limb and projections on the casing. In use the operating parts can be used to move the sliding carrier and on arrival at an opposed pair of detents the limbs flex to lock the carrier. The sliding carrier can be disengaged from the detents by inward compression of the limbs against their inherent resilience.

A particular embodiment of the invention will now be described by way of example and with reference to the accompanying drawings wherein:—

5 Figure 1 is a perspective view of an adaptor in accordance with the invention with all the slides and pins retracted;

Figure 2 is a front view of the adaptor with the interior components shown in dotted lines;

10 Figure 3 is a rear view of the adaptor;

Figures 4 and 5 are perspective views of the adaptor with one of the slides advanced to the forward position with pins protruding, alternative angular orientation of the pins being shown;

15 Figure 6 is a section on the line A—A of Figure 2 showing the advancing slide of Figures 4 and 5;

Figure 7 is a perspective view showing the adaptor with another slide advanced to a first position;

20 Figure 8 is a similar view indicating the slide shown in Figure 7 advanced further to a second position;

Figure 9 is a section on the line B—B of Figure 2 showing the advancing slide Figures 7 and 8;

25 Figure 10 is a perspective view of the adaptor with another slide advanced;

Figure 11 is a section on the line C—C of Figure 9 showing the advancing slide of Figure 10;

30 Figure 12 is a perspective view showing another slide advanced, that carrying three pins;

Figures 13 and 14 are sections on the line D—D and E—E of Figure 2 showing the advancing slide of Figure 12;

35 Figure 15 is a section on the line F—F of Figure 2 showing how the pins in the slides are electrically energised; and

Figures 16 and 17 are sections on the line G—G and H—H of Figure 14 illustrating the rear socket arrangement of the adaptor.

40 Referring now to Figure 1 of the drawings the adaptor illustrated comprises a tubular plastics casing 1 of rounded cross-section with chamfered top portions 2 to provide grip, and a flattened base 3. The casing has front and rear end covers 4 and 5. The front cover 4 has a plurality of apertures (a), to be described, to allow passage of pin arrays. Also well seen in Figure 1 are operating lugs L to advance selectively the required pin arrays. These lugs will be systematically described hereinafter. At this stage it can be noted that there are an upper pair of lugs, an intermediate pair of lugs and a lower pair of lugs on opposed side walls and a pair of lugs on the upper and lower surfaces. Depending on the selective advance and retreat of a chosen lug pair a particular pin configuration is brought forward into an operating condition for engagement with a particular socket configuration. The appliance to be used can be plugged into socket apertures 31 at the rear of the casing. These apertures 31 can accept two and three pin configurations.

55 Returning to the detailed description reference will initially be made to Figures 4, 5 and 6. The upper slide 6 is formed in one-piece from hard plastics material and comprises a bifurcated body

of generally rectangular form from which two legs 7 extend rearwardly. Opposed inwardly directed shelves 40 along each casing inner side wall provide guide structure in which the slide moves longitudinally in the body. A pair of contact pins 8 extend forwardly from the slide through slots 9 in the body front cover 4. The pins as can best be seen in figure 5 are of two-part construction with a flat front part 8f and a rear part 8r. Part 8f is in the form of a strip and part 8r in the form of a cylinder mounted for limited rotation about its axis. The forward position of the slide offers two pin configurations, with the pins straight for the USA in Figure 4 and in Figure 5 the pins rotated about the long axes to an inclined position for Australian and New Zealand sockets. An integrally formed resiliently flexible limb 11 extends forwardly and outwardly from each leg 7 to a laterally outwardly extending operating part or lug 12. Under the lug 12 is provided a detent projection 13. An inwardly extending stop 14 is provided to limit inward flexing of limb 11. The casing 1 has, at each side, an elongate rectangular slot 15 within which the lug 12 can be moved between front and rear positions to advance the pins 8. On the lower wall of each slot are provided front and rear detent recesses 16 and 17.

The section A—A shown in Figure 6 and the corresponding later section show the slide in divided form, one half, the right half, showing the retracted slide with the projection 13 engaging the recess 17 whilst on the left hand side the pin is shown advanced with the projection 13 engaging the recess 16. In both front and rear position the slide is securely locked until the lug is depressed to free the projection 13 from the respective detent. Excessive inward movement of the lug is limited by abutment of the stop 14 on the main body of the slide. The limbs 11 are deeper than the slots 15 so that in the forward position the limbs close the slot and act as a safety shroud.

Figures 7, 8 and 9 illustrate the intermediate pair of lugs selectively advancing round profile pins 18 on the next lower slide 6 through a wide slot 19 in front cover 4. In this slide and indeed in the slides described hereinafter the pins are effectively an electrically conductive tip and core in an electrically insulating body. The slide is constructed as before, and like parts are identified by like reference numerals. It should be noted however, that the slot 20 in which operating lug 21 moves is substantially greater length than the slot 15 and has not only front and rear detents but an intermediate detent 22 shown engaged in Figure 7. The section on Figure 9 corresponds to Figure 8 and shows the slide 6 advanced to the front position with a part to mate with the German "Shuko" type recessed socket. In the intermediate position with the detent projection 13 engaging the intermediate detent recess 22 the front of the slide 6 is flush with the front of the case and that is the configuration shown in Figure 7. This is the configuration for other countries on the continent of Europe such as Spain. Differences in the guide structure in the casing for the slide should also be

noted. Elongate guide posts 24 engage mating sockets 25 in the rear of the slide.

Figures 10 and 11 showing the next slide down require little comment though again the rear of the slide has a slightly different configuration. Again like reference numerals identify like parts. In principle however, the arrangement is similar to that described with reference to Figures 4 to 6. The pins are for Italian sockets.

Figure 12 and the corresponding sections in Figures 13 and 14 represent a three-pin array for U.K. sockets however require more detailed description.

The slide 25 carrying the three conductive-tipped pins 26 comprises a vertically disposed generally C-shaped member with limbs 27 corresponding to the limbs 11 of Figure 6 with the operating lugs 28, 29 on the upper and lower walls of case 1 and similar detent and stop arrangements. There is also provided as can best be seen from Figure 13 a basal cross-member 30 serving as the carrier for the lower pins, the operating limb 27 with the lug 29 protruding from the underside of this member 30. As before the operation comprises resilient depression of the limbs and sliding engagement of the studs with the detents.

The electrical connection arrangement to the rear socket entrances 31 (see Figure 3) can be appreciated from Figures 15 to 17. Each conductive pin has a rear conductive fixing to a conductive shoe 32. On each side of the casing is disposed a U-shaped conductor 33, live or neutral according to the casing side. The shoes 32 of the upper pins engage the upper surface of the upper limb of conductor 33 and the bottom pair of pins the undersurface. Each U-shaped conductor is fastened to a bulkhead 34 by a conductive pin 38 (Figure 17) passing through the bulkhead to a resiliently flexible conductive channel 35 constituting a socket member. As can best be seen from Figures 17 and 15 bulkhead 34 forms part of transversely extending wall structure 37 extending across the rear of the interior of casing 1. This structure not only houses socket channels 35 but also provides a guide and back stop for the rear of the slides.

Means can be provided for connecting the upper flat pin of the British type arrangement to the rear earth socket. In the absence of such connection the pin 26 will be made of insulating plastic. A movable safety shutter 36 (see Figure 16) is provided inside rear cover 5. This shutter, under spring bias covers entrances 31 until pushed aside by an entering plug.

In an alternative construction the slides 6 are formed for sliding interengagement with one another. As a further modification the rear of the casing may include a voltage converter/transformer with control means on the casing exterior. The adaptor can thus deal with different voltage values in a power supply.

In the device, as described above, the possibility exists for two or more slides to be advanced together. This is undesirable from the standpoint

of safety and it is proposed to incorporate some means such as a rotatable shutter which obstructs the forward sliding of all but a selected slide. As an alternative the terminal tips may be of electrically insulating material.

Claims

1. A multi-pin adaptor comprising at one end a plurality of pin arrays selectable to suit the appropriate mains power source to the locality of use and at the other end a socket or equivalent characterised by a tubular casing (1), a plurality of carriers (6) slidable longitudinally in the casing (1) each carrying a forwardly extending array of pins (8), (18) and (26) and being slidable between a rear pins-retracted position and at least one forward pins-protruding position, guides (15) in the peripheral wall of the casing engaged by complementary parts (12) laterally disposed on the respective carrier (6) and releasable detent means (13), (16), (17) operable from the side outer walls of the casing (1), the arrangement being that with a carrier moved at least to a front position and preferably also to the rear position the detent means operate securely to locate the carrier in that position until the detent is released.

2. An adaptor according to Claim 1 wherein means for moving the sliding carrier also control the detent means.

3. An adaptor according to Claim 1 or Claim 2 wherein the sliding carriers (6) are positioned in stacked relationship one above the other in the casing (1).

4. An adaptor according to Claim 3 wherein the guides are slots (15) extending along diametrically opposed positions in the walls of the tubular casing (1) and operating lugs (L) for the detent means protrude from the said slots (15).

5. An adaptor according to Claim 4 wherein each lug (L) is carried on a resiliently flexible limb (11) extending from one side of a sliding carrier (6), the limb (11) and the casing being formed for notch and projection inter-engagement to provide the detent, the detent being released by laterally inward movement of the limb (11).

Patentansprüche

1. Adapter mit mehreren Stiften, der am einen Ende mehrere Stiftnordnungen, die so wählbar sind, daß sie der zum Gebrauchsort gehörenden Netzstromquelle entsprechen, und am anderen Ende eine Steckdose oder eine entsprechende Einrichtung aufweist, gekennzeichnet durch ein rohrförmiges Gehäuse (1), mehrere Träger (6), die in Längsrichtung im Gehäuse (1) verschieblich sind, jeweils eine sich nach vorne erstreckende Anordnung von Stiften (8), (18) und (26) aufweisen und zwischen einer hinteren Lage, in der die Stifte eingefahren sind, und mindestens einer vorderen Lage verschieblich sind, in der die Stifte vorspringen, Führungen (15) in der

Umfangswand des Gehäuses, die mit komplementären Teilen (12) in Eingriff stehen, die seitlich am jeweiligen Träger (6) angeordnet sind, sowie lösbare Arretiereinrichtungen (13), (14), (17), die von den seitlichen Außenwänden des Gehäuses (1) her betätigbar sind, wobei die Anordnung so getroffen ist, daß bei einem mindestens in eine vordere Lage und bevorzugt auch in eine hintere Lage bewegten Träger die Arretiereinrichtung zuverlässig die Positionierung des Trägers in dieser Lage bewirkt, bis die Arretierung gelöst wird.

2. Adapter nach Anspruch 1, wobei eine Einrichtung zum Bewegen des gleitenden Trägers auch die Arretiereinrichtung steuert.

3. Adapter nach Anspruch 1 oder Anspruch 2, wobei die gleitenden Träger (6) im Gehäuse (1) übereinanderliegend in gestaffelter Zuordnung angeordnet sind.

4. Adapter nach Anspruch 3, wobei die Führungen Schlitz (15) sind, die sich längs diametral gegenüberliegender Stellen in den Wänden des rohrförmigen Gehäuses (1) erstrecken, und Betätigungsnasen (L) für die Arretiereinrichtungen von den Schlitz (15) vorspringen.

5. Adapter nach Anspruch 4, wobei jede Nase (L) an einem federnd flexiblen Glied (11) getragen ist, das sich von der einen Seite eines gleitenden Trägers (6) aus erstreckt, das Glied (11) und das Gehäuse für den gegenseitigen Eingriff einer Vertiefung und eines Vorsprungs ausgebildet sind, um die Arretierung zu bilden, und die Arretierung durch die seitwärts gerichtete Einwärtsbewegung des Gliedes (11) gelöst wird.

Revendications

1. Adaptateur à broches multiples, comprenant à une extrémité, plusieurs groupes de broches pouvant être choisis pour convenir au secteur d'alimentation électrique de l'endroit d'utilisation et, à l'autre extrémité, une prise de courant ou dispositif équivalent, caractérisé en ce qu'il comprend un logement tubulaire (1), plusieurs supports (6) pouvant coulisser longitudinalement dans le logement (1) et portant chacun un groupe de broches (8), (18) et (26) s'étendant vers l'avant et pouvant coulisser entre une position arrière à broches rétractées et au moins une position avant à broches en saillie, des guides (15) prévus dans la paroi périphérique du logement et coopérant avec des parties complémentaires (12) prévues latéralement sur le support (6) correspondant, et des moyens de détente libérables (13), (16), (17) pouvant être actionnés depuis l'extérieur du logement (1), l'agencement étant tel que, lorsqu'un support est déplacé au moins jusqu'à une position avant et de préférence également jusqu'à la position arrière, les moyens de détente agissent de manière sûre pour localiser le support dans cette position jusqu'à ce que cette détente soit libérée.

2. Adaptateur suivant la revendication 1, caractérisé en ce que les moyens prévus pour

déplacer le support coulissant commandent également les moyens de détente.

3. Adaptateur suivant la revendication 1 ou la revendication 2, caractérisé en ce que les supports coulissants (6) sont disposés à l'état empilé l'un au-dessus de l'autre à l'intérieur du logement (1).

4. Adaptateur suivant la revendication 3, caractérisé en ce que les guides sont constitués par des fentes (15) s'étendant suivant des positions diamétralement opposées dans les parois du logement tubulaire (1), et en ce que des pattes de

commande (L) pour les moyens de détente font saillie depuis ces fentes (15).

5. Adaptateur suivant la revendication 4, caractérisé en ce que chaque patte (L) est portée par un membre flexible et résilient (11) s'étendant depuis un côté d'un support coulissant (6), le membre (11) et le logement étant conformés pour coopérer par une encoche et une saillie en vue d'assurer le système de détente, celui-ci étant libéré par un déplacement latéral du membre (11) vers l'intérieur.

15

20

25

30

35

40

45

50

55

60

65

5

0 156 076

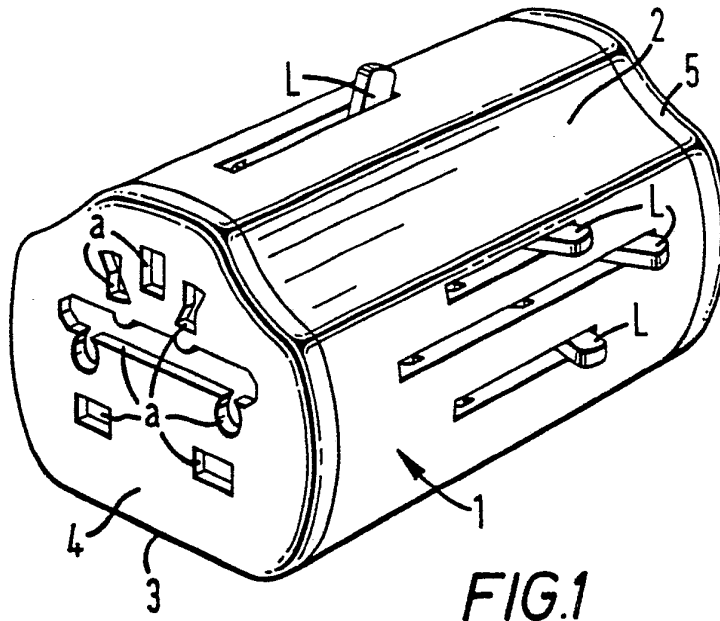


FIG. 1

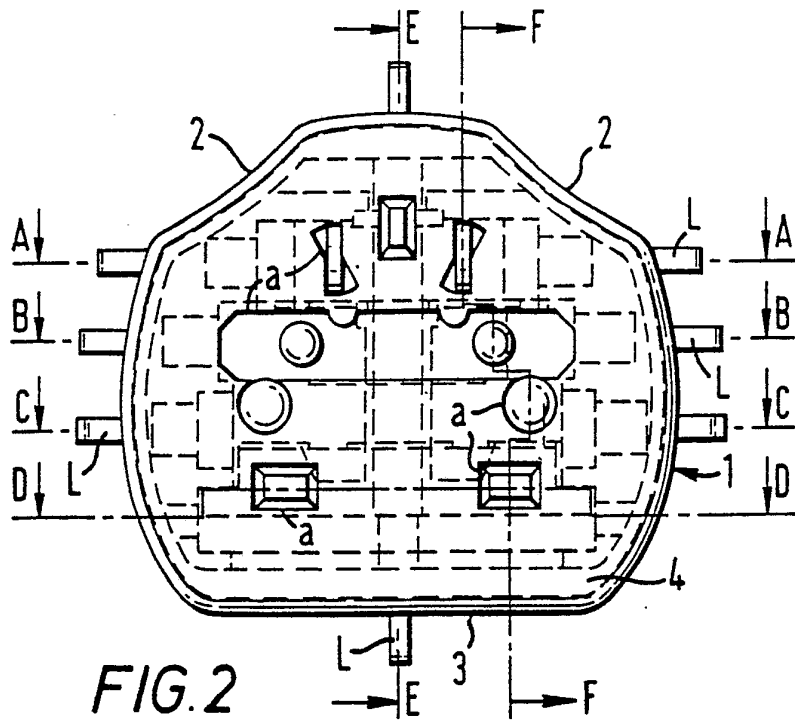


FIG. 2

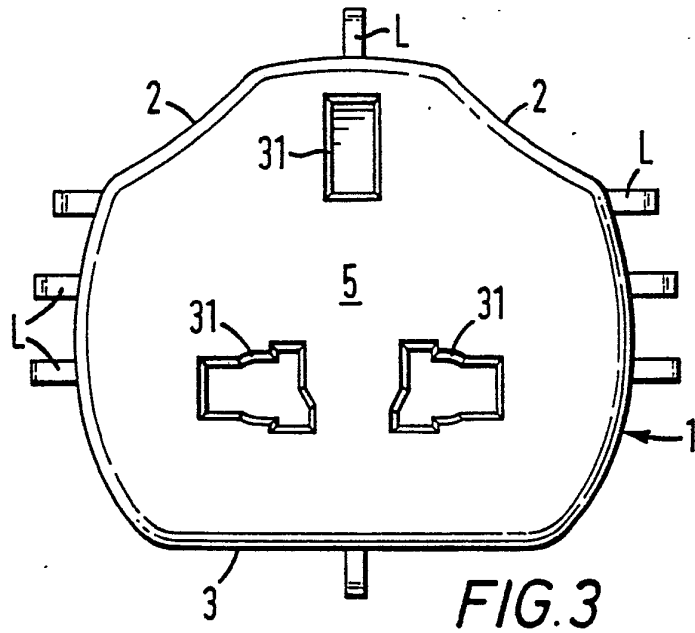
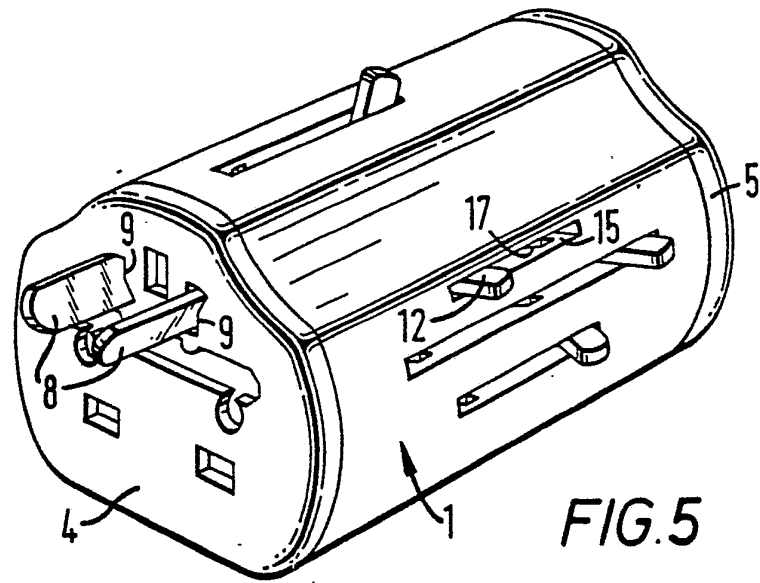
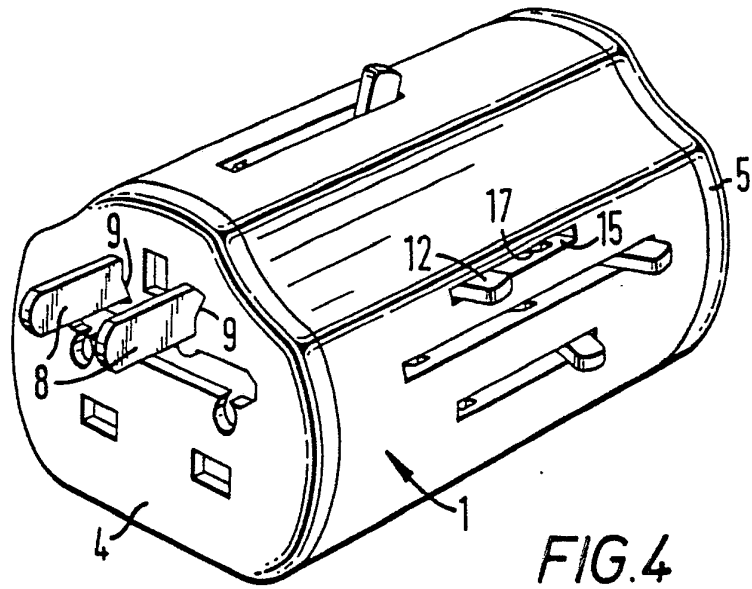
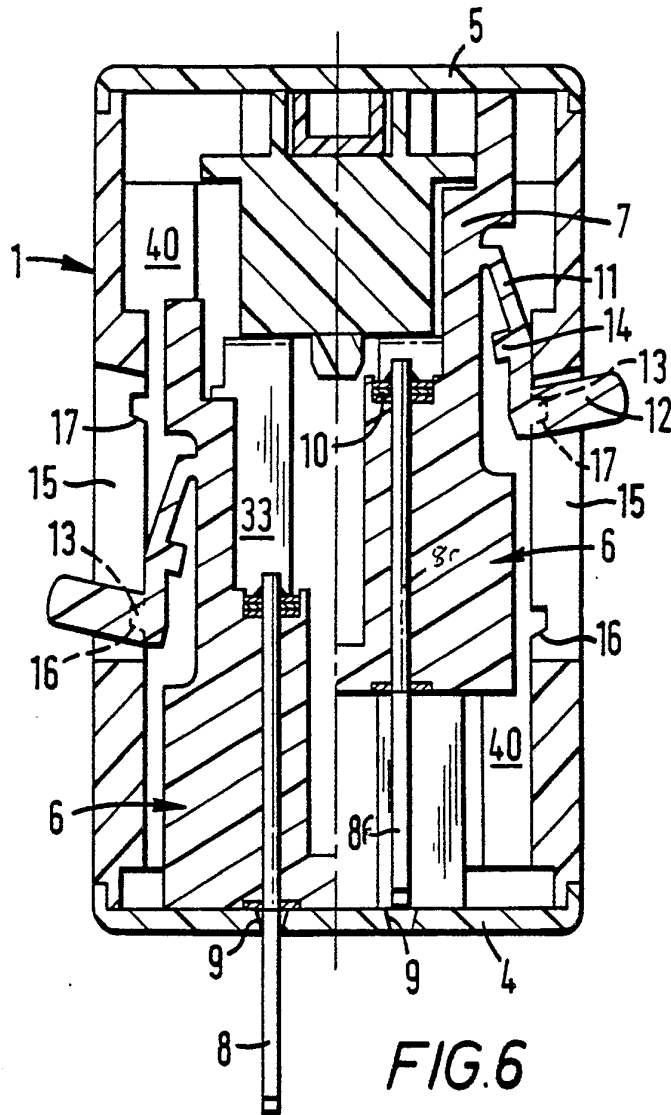
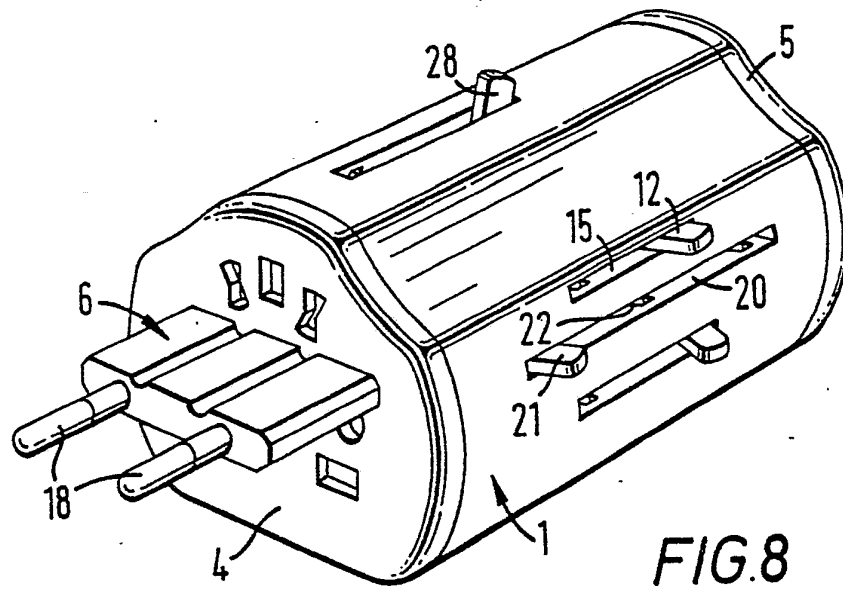
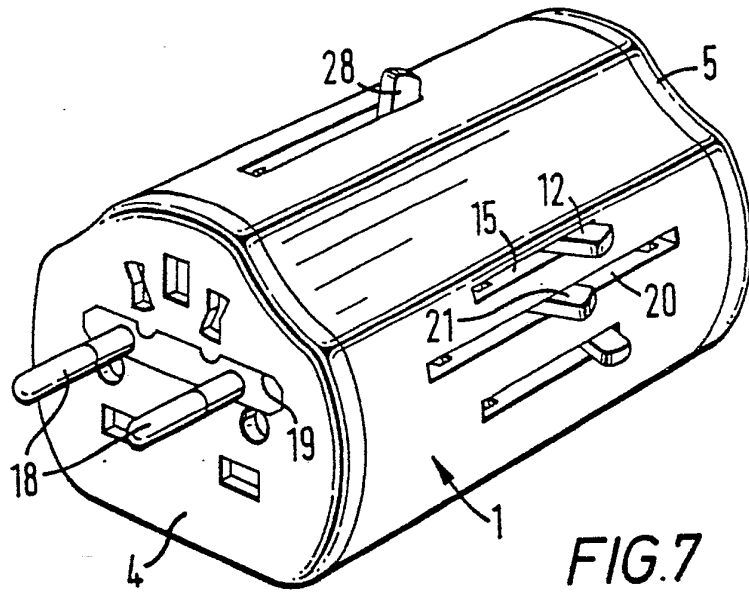
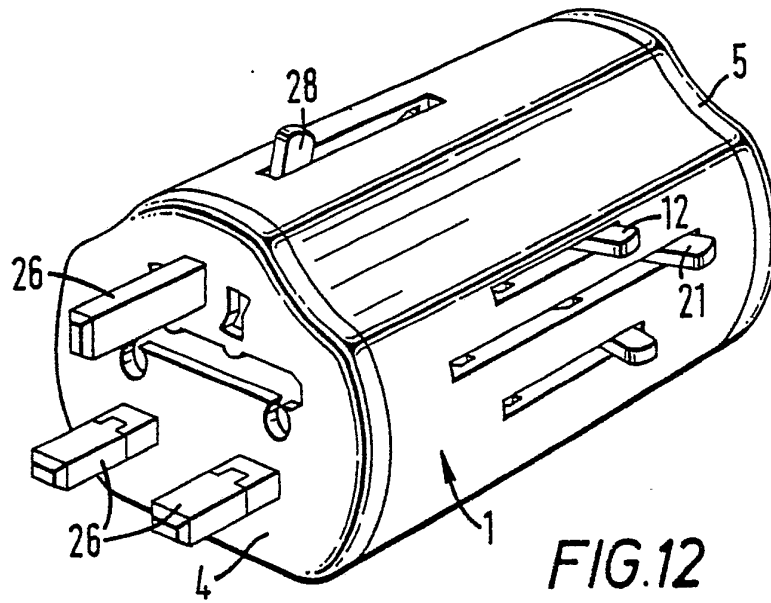
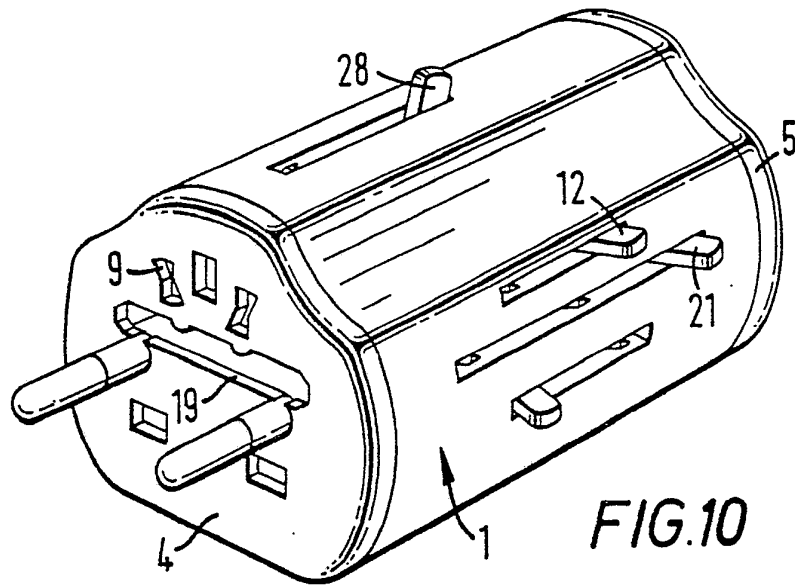



FIG. 3









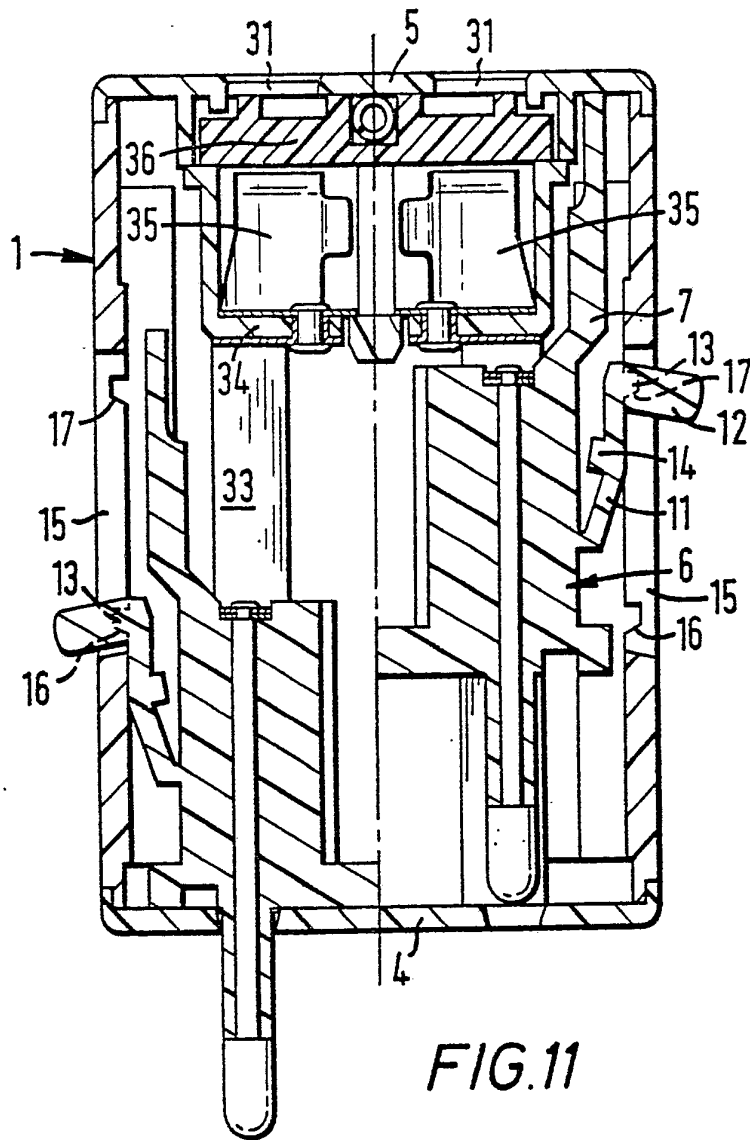

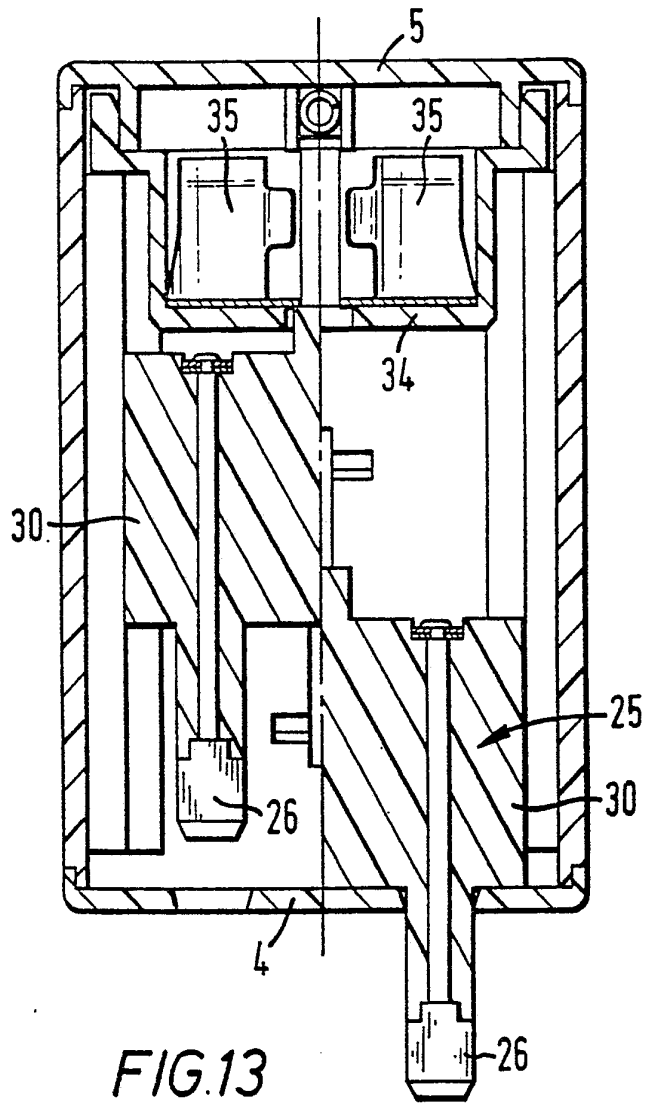
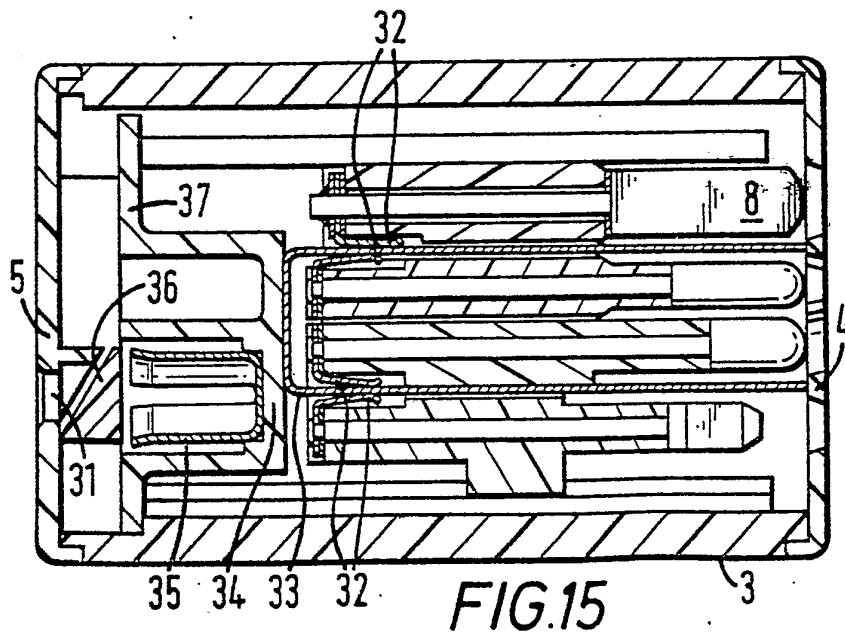
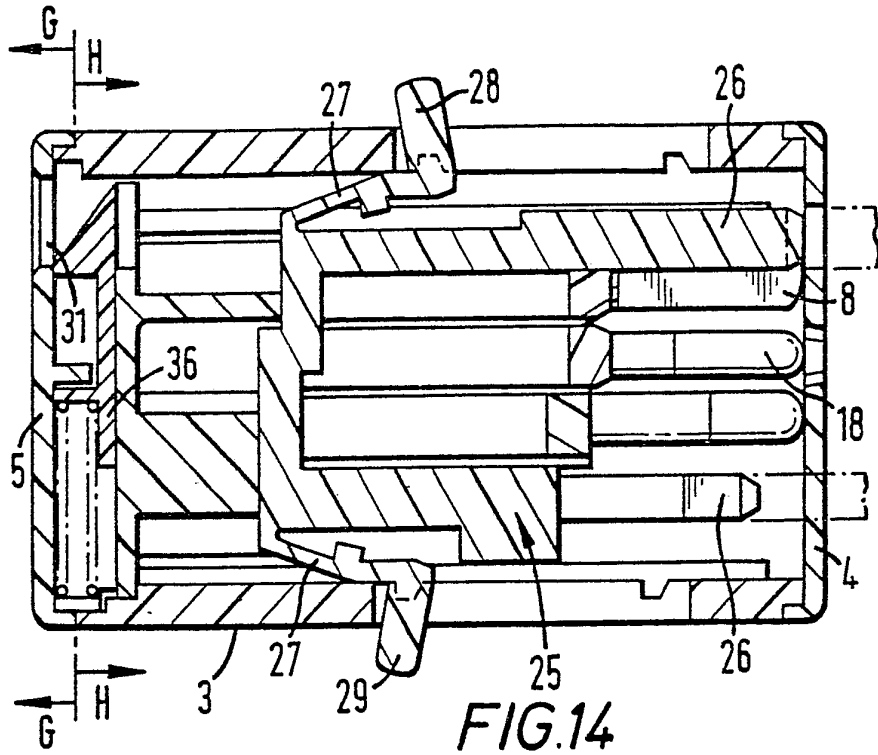


FIG.13



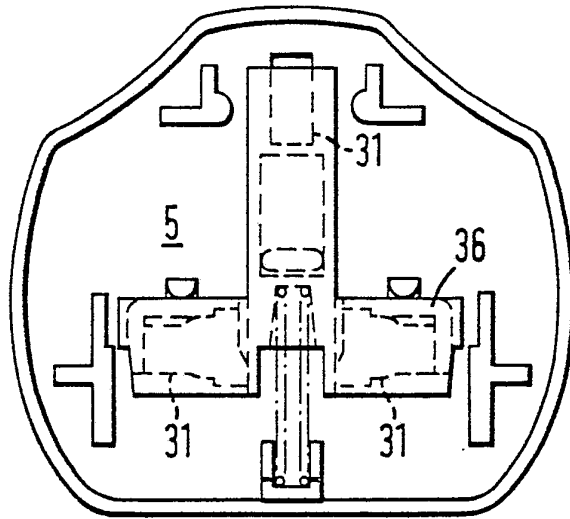


FIG. 16

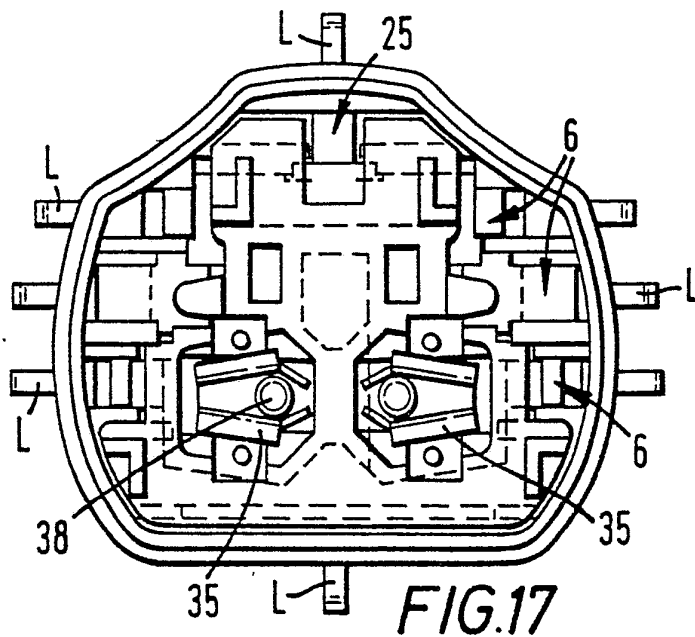


FIG. 17